

Xpelair GX Fans Specification Sheet



GX9 & GX12 COMMERCIAL AC FAN BROCHURE

GX9 & GX12


Commercial AC window fans

GX9 and GX12 window fans have remained a byword for commercial window fans for over 40 years. Supplied with longer ladder strips for ease of installation and with a safety finger-guard integrated into the housing and the window grille. Plus, a tamper-proof positive plug and socket assembly provides a means of isolation for service access. Both 9" and 12" models are reversible and feature an enclosed external rotor motor providing constant volume outputs, even in gusty external conditions.



Key Features

- Electro-thermal shutter
- Single or double glazed window installation
- Window kit supplied
- Safety finger guard
- 2 year UK manufacturer guarantee

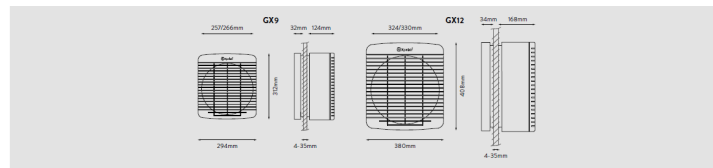

Product Selector		Standard	Pullicord	9" Impeller	12" Impeller	Reversible Intake/Extract	Silent Electro-thermal Shutter
Model							
GX9	89994AW	✓		✓		✓	✓
GXC9	89995AW		✓	✓			
GX12	90012AW	✓			✓	✓	✓

Product Selector		Remote Switch (supplied separately)	Selectable Intake, Extract or Controller Operation	Extract Performance (m ³ /h)	Extract Performance (l/s)	Intake Performance (m ³ /h)	Intake Performance (l/s)
Model							
GX9	89994AW	✓	✓	543/636	151/177	405/449	113/125
GXC9	89995AW			520	145		
GX12	90012AW	✓	✓	1091/1546	303/429	772/1117	215/310

Product Selector		Speeds (2 speed when used with a FR22/30 controller)	Sound Pressure Level (dB(A)@3m)	Electrical Power Rating (W)	Hole Diameter (mm)	Hole Diameter with Wall Liner (mm)	Weight (kg)
Model							
GX9	89994AW	2	48/50	41	257	266	4
GXC9	89995AW	1	44	32	257	266	3.9
GX12	90012AW	2	50/55	85	324	330	7.9