

Xpelair WX Fans Specification Sheet


WX6, WX9 & WX12

Commercial wall fans with corrugated plastic wall liner






WX commercial duty wall fans are designed for pubs, restaurants, offices, kitchens, factories, schools and shops, and are suitable for single, cavity brick and timber frame walls. The low profile white fascia is styled to blend in cleanly with commercial surroundings, while on the WX9 and WX12 units a positive plug and socket assembly provides a means of isolation. All WX models come complete with a wall-mounting kit which includes a corrugated plastic wall liner.

Commercial

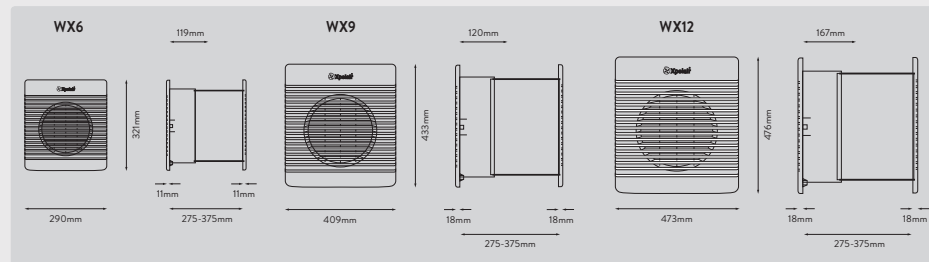

Product Features	WX6	WX6T	WX9	WX12
Reference Number	90822AW	90823AW	89996AW	90011AW
Standard	✓		✓	✓
Timer		✓		
6" Impeller	✓	✓		
9" Impeller			✓	
12" Impeller				✓
Reversible Intake/Extract			✓	✓
Silent Electro-thermal Shutter	✓	✓	✓	✓
Trickle Ventilation Facility	✓	✓	✓	✓
Safety Finger Guard	✓	✓	✓	✓
Plastic Telescopic Wall Liner Supplied	✓	✓	✓	✓

Product Selector	WX6	WX6T	WX9	WX12
Reference Number	90822AW	90823AW	89996AW	90011AW
Remote Switch (not supplied)	✓	✓	✓	✓
Integral Adjustable Run-on Timer (2 - 20 mins)		✓		
Extract Only	✓	✓		
Selectable Intake, Extract or Controller Operation			✓	✓
Speeds (2 speed when used with an FR22/30 controller)	1	1	2	2
Extract Performance (m ³ /h) high/low	246	246	600/693	1162/1715
Extract Performance (l/s) high/low	57	57	166/192	322/476
Intake Performance (m ³ /h) high/low			418/459	815/969
Intake Performance (l/s) high/low			116/127	226/269
Sound Pressure Level (dBA@3m) high/low	39	39	47/50	48/54
Electrical Power Rating (W)	34	34	41	85
Hole Diameter (w x h mm)	245 x 268	245 x 268	345 x 375	434 x 434
Wall Thickness (mm)	275 - 375	275 - 375	275 - 375	275 - 375
Weight (kg)	2.9	2.9	4.7	8.3

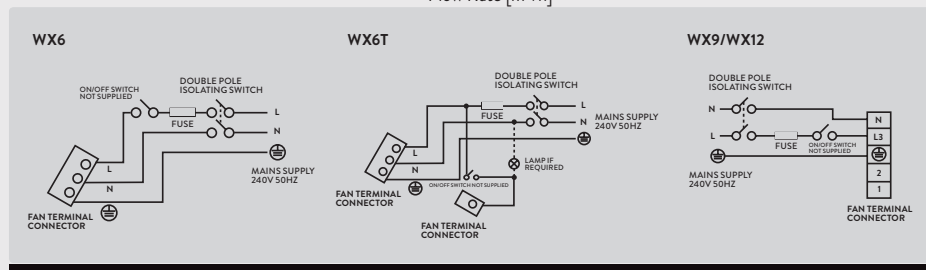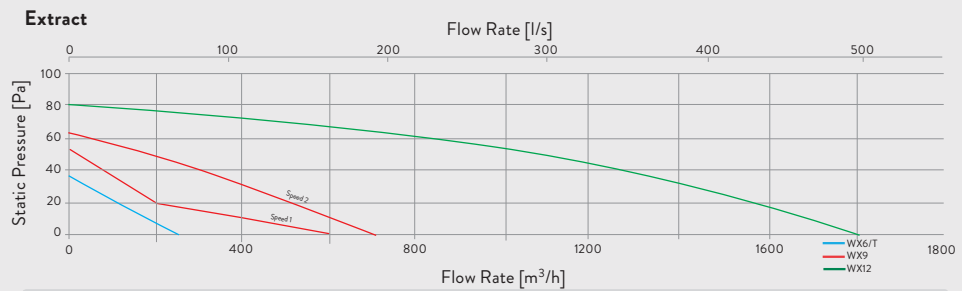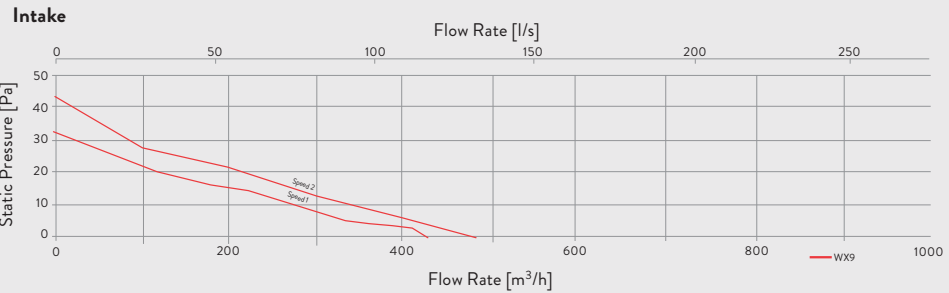

ANCILLARIES

See pages 116-130